

数显倒置荧光模块




倒置数显荧光模块



- 倒置显微镜数显荧光模块
- 正面可视亮度数字化显示屏做波段及亮度
- 手动平稳切换选择不同荧光使用
- 使用12V低压电波供电
- 编码式调节旋钮电位器，可无级调节亮度

拍摄图

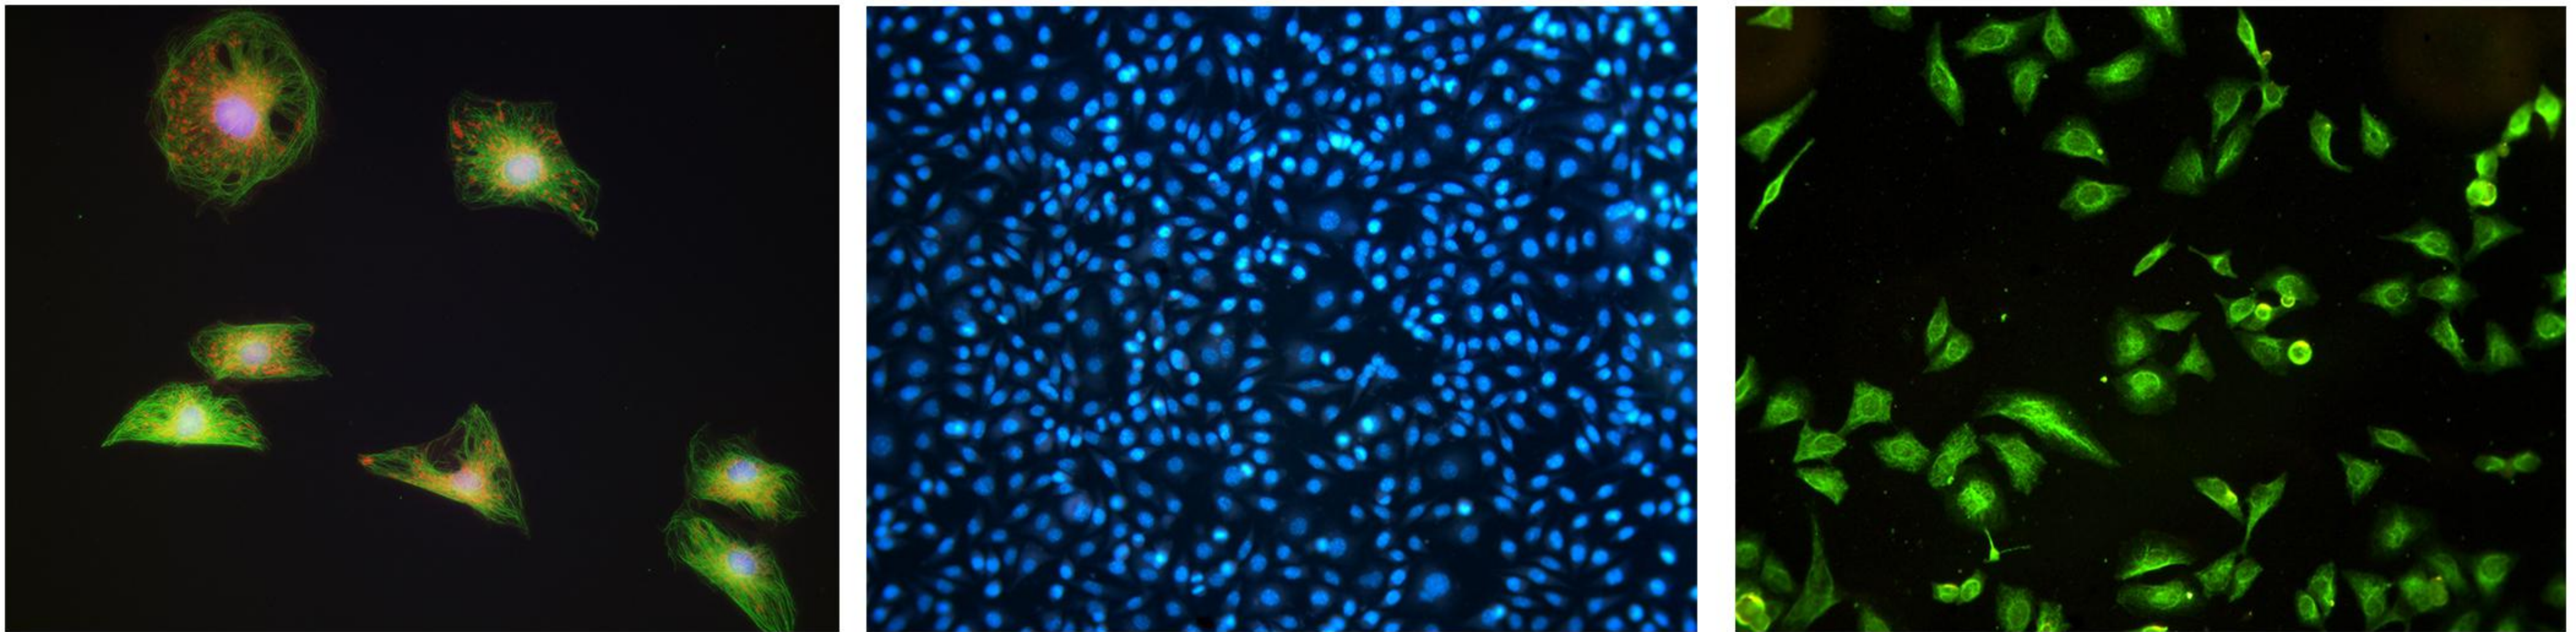

技术参数

滤光组	B	B BP : EX:475/30nm; DM:505nm; EM:530/40nm B LP : EX:475/30nm; DM:500nm; EM:510 nmLP
	G	G BP : EX:530/40nm; DM:565nm; EM:605/55nm
		G LP : EX:530/40nm; DM:570nm; EM:575 nmLP
	U	UV BP: EX: 375/30nm; DM:415nm; EM:460/50nm
		UV LP: EX: 355/50nm; DM:410nm; EM:420 nmLP
Y	Y LP: EX: 560/40nm; DM:600nm; EM:610 nmLP	
激发光源	3W LED光源(Y/G为5W)，亮度可调、可视数显	
观察方式	荧光、明场切换	
输入电源	DC 12V2A	

